


# EOLO PUP EST




Tubo trasparente in poliuretano base estere, con spirale di rinforzo in PVC rigido antiurto di color grigio scuro; superficie interna perfettamente liscia; notevole resistenza all'abrasione e alla flessione. Spessore di parete da 0,8 mm a 1,00 mm. Versione antistatica su richiesta.

- Trasporto di trucioli e granulati abrasivi; industria delle materie plastiche, ceramica, industria della lavorazione del legno.

*Transparent ester based Polyurethane hose, reinforced with a dark grey anti-shock PVC spiral. Completely smooth bore, corrugated outside; really good resistance to abrasion and torsion. Wall thickness from 0,8 mm to 1,0 mm. Antistatic version on request.*

*• Suction and transport of abrasive media such as powders, pellets, granulates, fibres and dust. It finds optimal application in the plastic, woodworking and ceramic industries and when a very good abrasion resistance is required.*

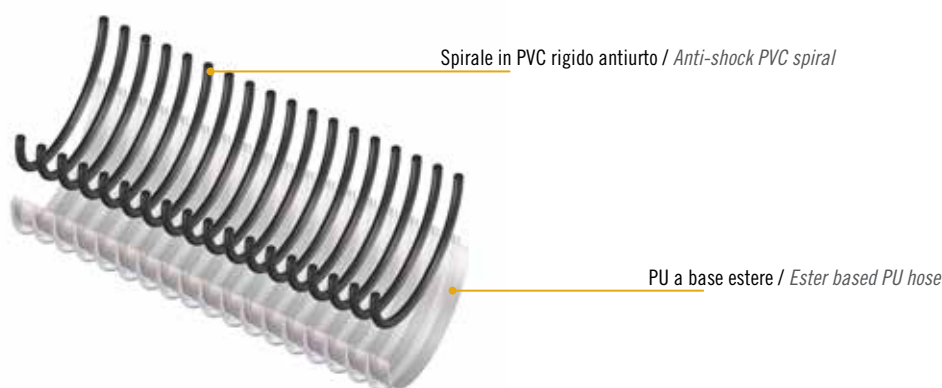

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	R. Curvatura	Depr.	Lg. Rotolo	Vol.
Code	Ø Int.	Min wall th.	Max wall th.	Weight	Bending	Vac.	Coil lgth.	Vol.
	mm	mm	mm	g/m	mm	m H <sub>2</sub> O	m	m <sup>3</sup>
OP 01 030.0 000.0	30*	0,8	3,3	250	100	3,5	30	0,085
OP 01 032.0 000.0	32*	0,8	3,3	265	110	3	30	0,094
OP 01 035.0 000.0	35*	0,8	3,5	290	120	3	30	0,102
OP 01 038.0 000.0	38,1	0,8	3,5	310	130	3	30	0,115
OP 01 040.0 000.0	40	1,0	3,5	350	140	3	30	0,133
OP 01 045.0 000.0	45	1,0	3,8	440	160	3	30	0,149
OP 01 052.0 000.0	50,8	1,0	4,3	550	175	3	30	0,200
OP 01 060.0 000.0	60	1,0	4,3	640	200	3	30	0,240
OP 01 063.0 000.0	63,5	1,0	4,2	670	230	3	30	0,291
OP 01 065.0 000.0	65*	1,0	4,2	680	230	3	30	0,296
OP 01 070.0 000.0	70	1,0	4,7	750	250	3	30	0,367
OP 01 076.0 000.0	76,2	1,0	4,7	810	270	2,5	30	0,434
OP 01 080.0 000.0	80	1,0	5,2	900	290	2,5	30	0,486
OP 01 090.0 000.0	90	1,0	5,3	1050	360	2,5	30	0,575
OP 01 100.0 000.0	100	1,0	5,8	1240	400	2,5	30	0,714
OP 01 102.0 000.0	102	1,0	5,8	1270	400	2,5	30	0,727
OP 01 110.0 000.0	110*	1,0	6,0	1380	440	2,5	30	0,846
OP 01 120.0 000.0	120	1,0	6,0	1500	470	2,5	30	0,964
OP 01 127.0 000.0	127*	1,0	6,0	1600	500	2,5	30	1,122
OP 01 130.0 000.0	130*	1,0	6,1	1650	520	2,5	30	1,147
OP 01 140.0 000.0	140*	1,0	6,1	1800	570	2	30	1,649
OP 01 150.0 000.0	151,5*	1,0	6,5	2000	600	2	20	1,264
OP 01 152.0 000.0	152,8*	1,0	6,6	2025	600	2	20	1,275

\*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / \*Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity